

# Doo-Wop

Doo-Wop - 5741093423

The fixture primarily provides a downward directed soft light by means of the white lacquered inner conical reflector. The outer reflector, the main shade, contributes to directing the light up- and downwards, while at the same time spreading the soft diffused light. The inside of the main shade is illuminated through an opening in the inner conical reflector.



**Carl Hansen &  
Son Showroom**



**INGENIØR'NE**

## Product info

### Information

Please note that the brass, copper and stainless steel surfaces are untreated. This means that the surface will change over time and develop a patina. This process may have already begun when the product is delivered.

### Mounting

Suspension type: Cable 2x0,75mm<sup>2</sup>. Canopy: Yes. Cable length: 3m.

### Finish

White or Dark Grey, powder coated or polished Brass, Copper or Stainless Steel.

### Materials

Shade: Spun aluminium, brass, copper or stainless steel. Suspension: Spun aluminium. Struts: Stainless steel.

### Sizes and weights

Width x Height x Length (mm) | 283 x 245 x 283 Max 2.0 kg

### Class

Ingress protection IP20. Electric shock protection II.

### Light source

1x60W E27


### Information

Please note that the brass, copper and stainless steel surfaces are untreated. This means that the surface will change over time and develop a patina. This process may have already begun when the product is delivered.




# Light distribution diagrams


Cartesian

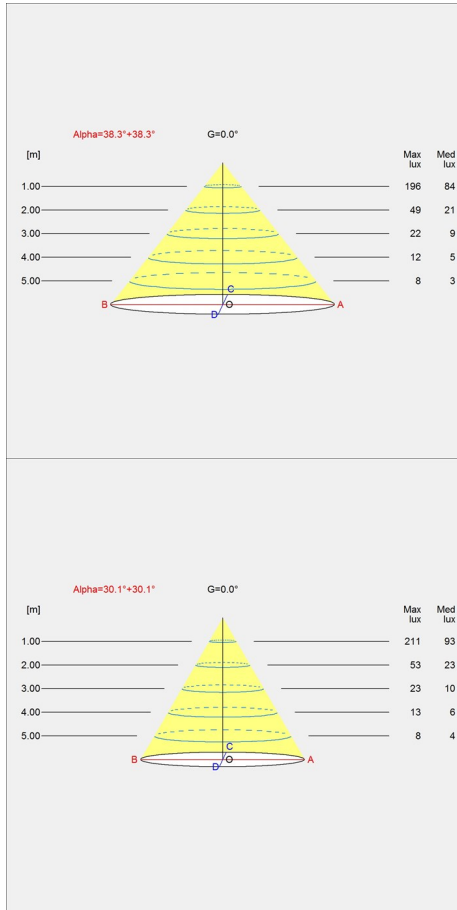

Isolux

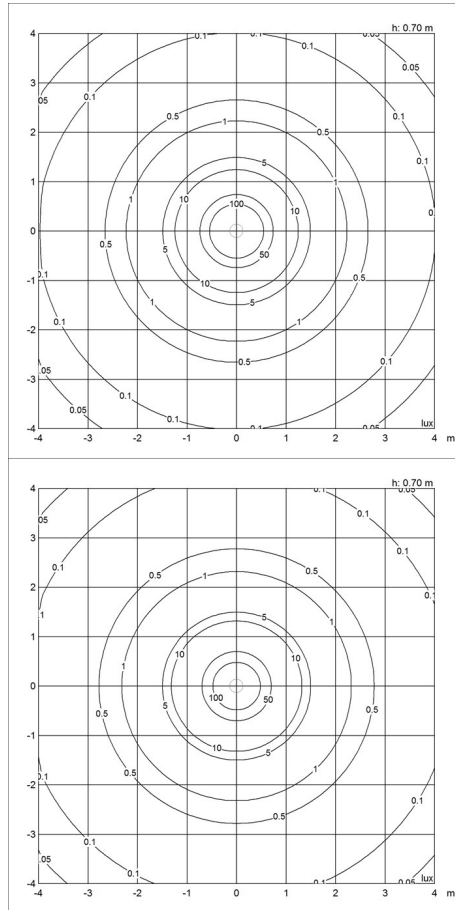

Polar

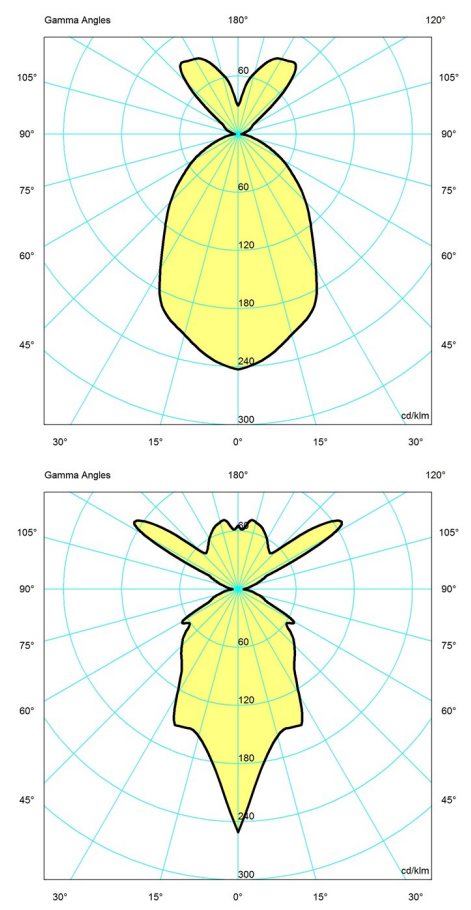

## Spare parts & accessories

**Product**

Canopy White 2-part tophat ©  
 Doo-Wop socket + cord suspension

**Variant number**

5749329034  
 5741094613

## Data specifications

Colour

Dark grey

Length

283

**Doo-Wop**

Width	<b>283</b>
Built-in Height	-
Class	<b>II</b>
Standby (W)	-
Inrush Current	-
Kelvin	-
SDCM	-
Watt	-
Light control	-
UGR Transversal / Axial	<b>18.7/18.7</b>
Driver life	-

Height	<b>245</b>
IP class	<b>20</b>
Net Weight	<b>1.0</b>
Power Factor (P = 100 % / P = 50 %)	-
Light source	<b>1x60W E27</b>
CRI	-
Lumen	-
Efficacy	-
Min. Dim Level (%)	-
L80B50 (hours)	-