


AJ Royal

AJ Royal - 5741104202

The pendant comes in three sizes and is characterised by the ridges on top that allow a gentle light to exude upwards. The new, energy-saving LED version comes with a diffuser, which offers a smoother, 100% glare-free lighting.



Arne Jacobsen

Arne Jacobsen was born and raised in Copenhagen. In 1927, he graduated as an architect from the Royal Danish Academy of Fine Arts in Copenhagen. After graduating, he obtained his first job at the office of the City Architect of Copenhagen launching his own office only two years later.



Product info

Information

The white version is supplied with a white cable and the black version is supplied with a black cable. Compatible with leading and trailing edge mains dimmers. Please note that low power consumption on some products can affect dimming properties.

Mounting

Suspension type: Cable 2x0,75mm². Canopy: Yes. Cable length: 4m.

Finish

White or black, wet painted.

Materials

Shades: Spun aluminium. Rings: Steel. Diffuser: Frosted acrylic

Sizes and weights

Width x Height x Length (mm) | 370 x 181 x 370 Max 1.9 kg | 500 x 225 x 500 Max 5.8 kg | 250 x 115 x 250 Max 2.4 kg

Class

Ingress protection IP20. Electric shock protection I w/ ground.

Light source

LED 2700K 16W
Lumen: 1100

Information


The white version is supplied with a white cable and the black version is supplied with a black cable. Compatible with leading and trailing edge mains dimmers. Please note that low power consumption on some products can affect dimming properties.




Product family



AJ Table



AJ Floor



AJ Wall




AJ 50 Wall




AJ Mini Table

Light distribution diagrams


Cartesian

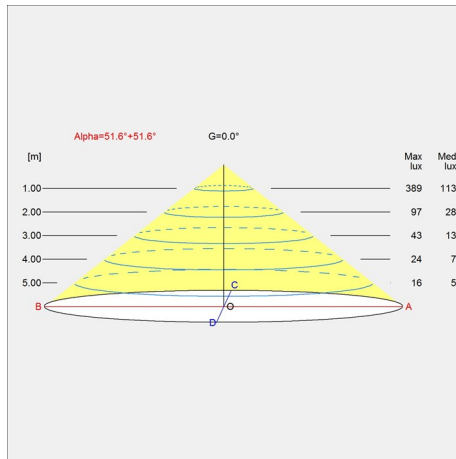

Isolux

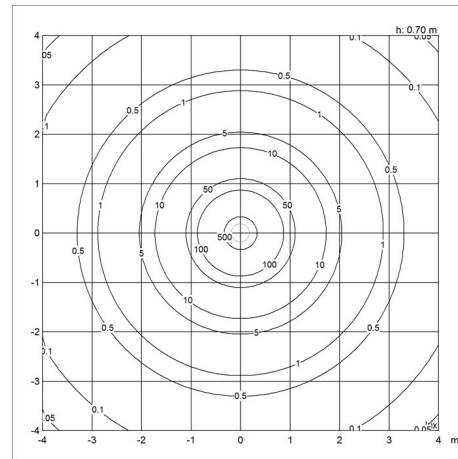

Polar

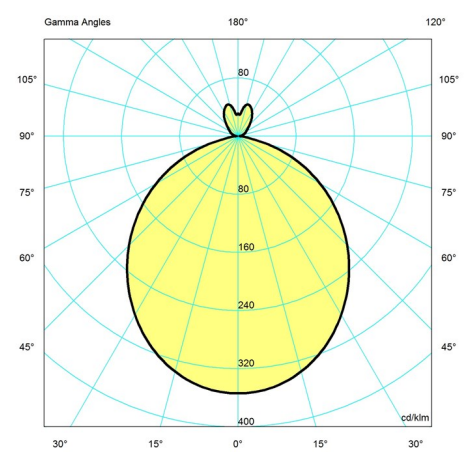

Data specifications

Colour	White	Length	370
Width	370	Height	181
Built-in Height	-	IP class	20
Class	I	Net Weight	1.9
Standby (W)	>0,5	Power Factor (P = 100 % / P = 50 %)	-
Inrush Current	5 A / 50 μ s	Light source	LED 2700K 16W
Kelvin	2700	CRI	90
SDCM	3	Lumen	1100
Watt	16	Efficacy	69
Light control	Dali	Min. Dim Level (%)	1
UGR Transversal / Axial	16.9/16.9	L80B50 (hours)	>50000
Driver life	50000		